




Lighting control for no neutral installations

TYPICALLY USED FOR

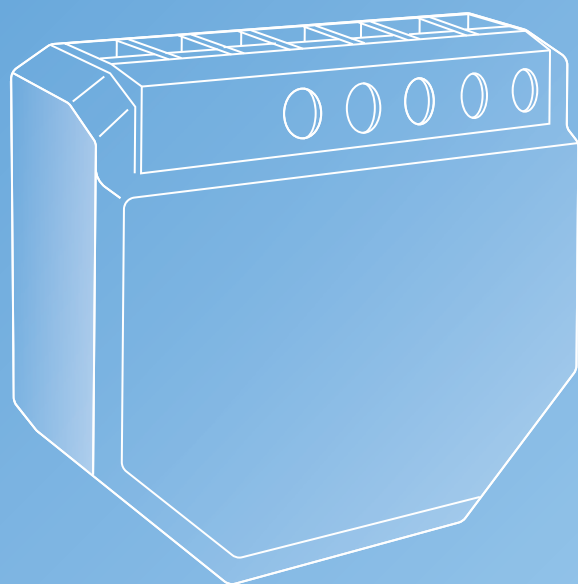

Lights



No neutral Installation



EU



Shelly 1L Gen3



Power supply **220-240 V~ 50Hz (Shelly Bypass is required)**

Max. switching power **200W**

Connectivity **Wi-Fi 4
Bluetooth 4.2**

CPU **ESP-Shelly-C38F**

Flash Memory **8 MB**

Size (HxWxD) **37x42x16 mm /
1.46x1.65x0.63 inch**

Weight **24 g / 0.85 oz**

Certifications **RED, LVD, EMC, ROHS**


[more info →](#)

EU



Shelly 2L Gen3



Power supply **220-240 V~ 50Hz (Shelly Bypass is required)**

Max. switching power **200W through O1
700W through O2**

Connectivity **Wi-Fi 4
Bluetooth 4.2**

CPU **ESP-Shelly-C38F**

Flash Memory **8 MB**

Size (HxWxD) **37x42x16 mm /
1.46x1.65x0.63 inch**

Weight **24 g / 0.85 oz**

Certifications **RED, LVD, EMC, ROHS**


[more info →](#)