




0/1-10V Controllers



TYPICALLY USED FOR

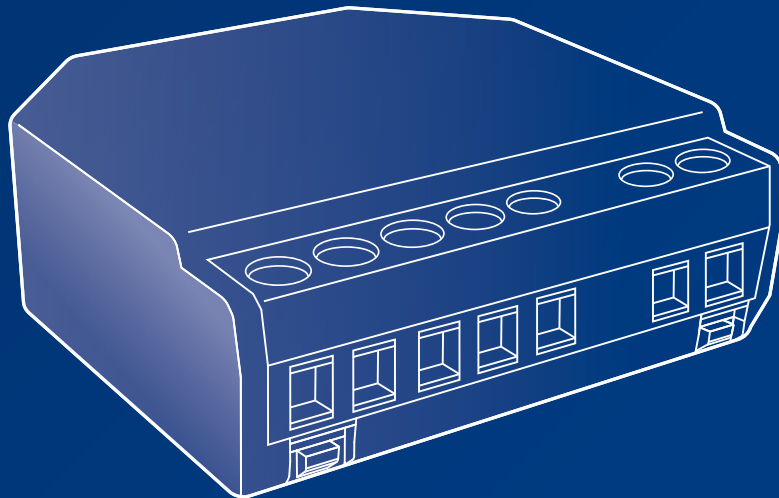

LED strips



Lights




Dimming



Power monitoring



GLOBAL



Shelly Dimmer 0/1-10V PM Gen3



Power supply 110-240 V~

Max load 13 A (240 V~)

Connectivity Wi-Fi 4
Bluetooth 4.2

CPU Shelly ESP32 C3

Flash Memory 8 MB

Size (HxWxD) 38.5x43.5x17mm /
1.52x1.71x0.67in

Weight 28.5 g / 0.99 oz

Certifications RED, LVD, EMC, ROHS, RCM


[more info →](#)

GLOBAL



Shelly Pro Dimmer 0/1-10V PM



Power supply 110-240 V~

Max load 16 A (240 V~)

Connectivity Wi-Fi 4
Bluetooth 4.2

LAN
CPU ESP32-D0WDQ6

Flash Memory 8 MB

Size (HxWxD) 94x19x69 mm /
3.70x0.75x2.71 in


Weight 70 g / 2.5 oz

Certifications RED, LVD, EMC, ROHS, RCM


[more info →](#)



RGBW / RGBWW Controllers

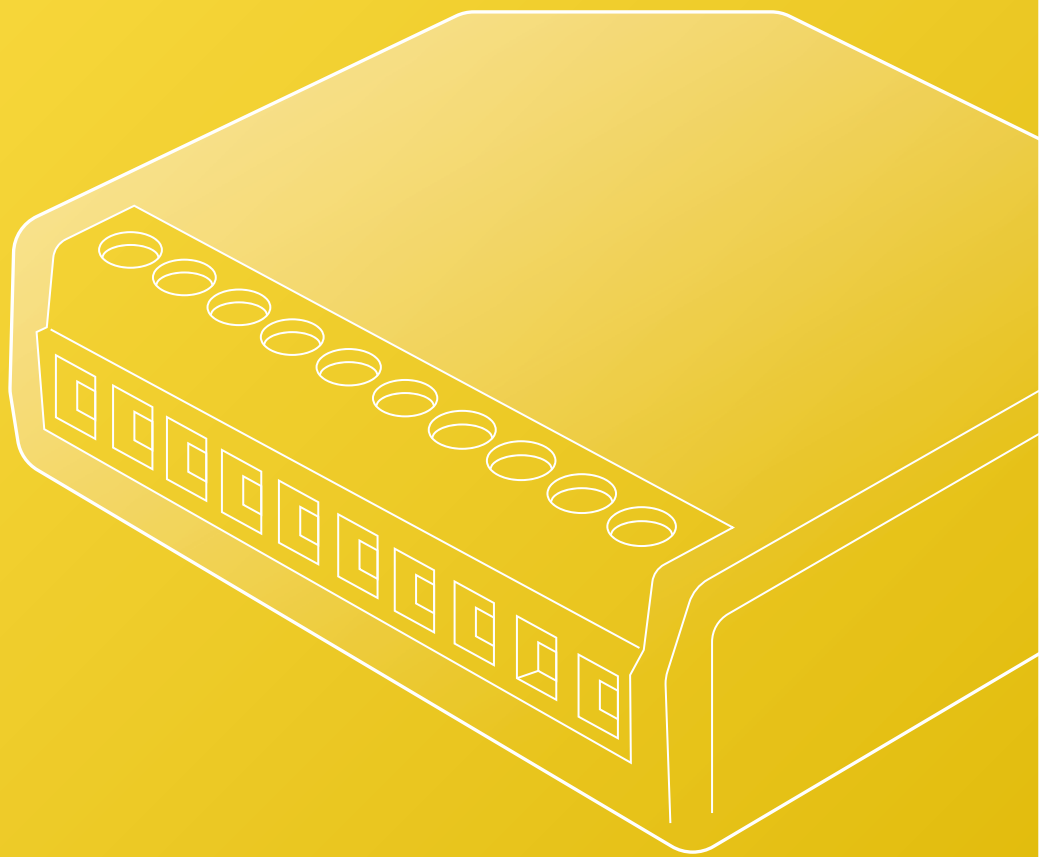

TYPICALLY USED FOR



LED strips



Lights




Dimming



Colour



Power monitoring

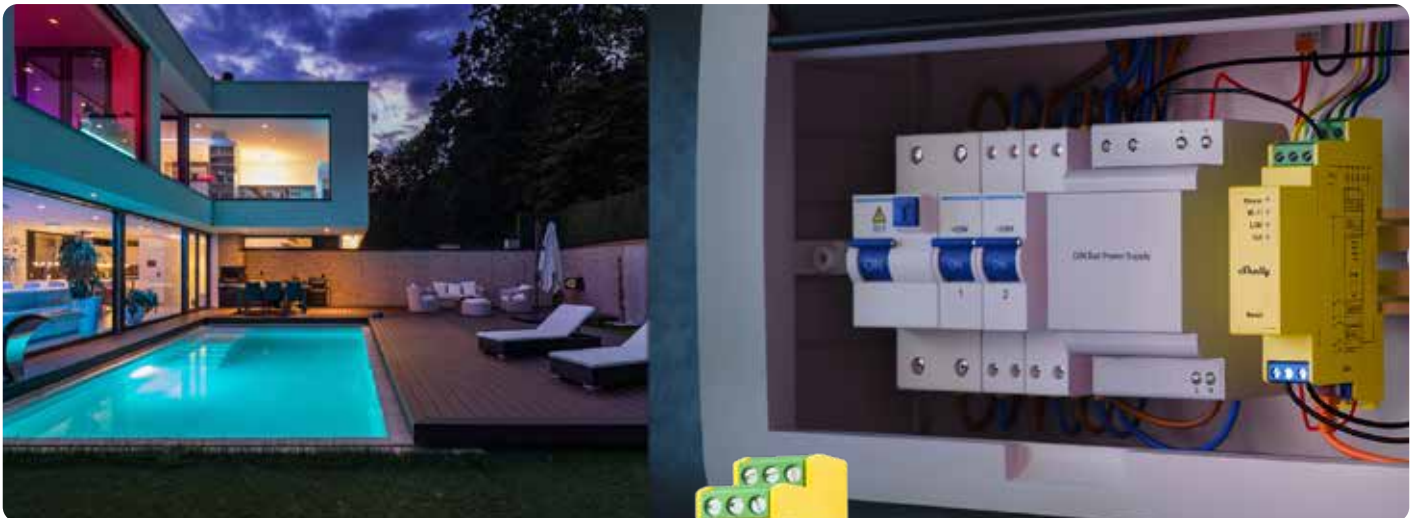

GLOBAL



Shelly Plus RGBW PM



Power supply 12-24 V $\overline{\text{DC}}$

Max load 4 A per channel (10 A total)

Connectivity Wi-Fi 4
Bluetooth 4.2

CPU ESP-Shelly-C38F

Flash Memory 4 MB

Size (HxWxD) 42x37x12 mm /
1.65x1.46x0.66 inch

Weight 17 g / 0.60 oz

Certifications RED, EMC, ROHS, RCM


[more info →](#)

GLOBAL



Shelly PRO RGBWW PM



Power supply 12-24 V $\overline{\text{DC}}$

Max load 6 A per channel (16 A total)

Connectivity Wi-Fi 4
Bluetooth 4.2

LAN
CPU ESP32-D0WDQ6

Flash Memory 8 MB

Size (HxWxD) 94x19x69 mm /
3.70x0.75x2.71 inch

Weight 61 g / 2.15 oz

Certifications RED, EMC, ROHS


[more info →](#)