




Dimmers



TYPICALLY USED FOR

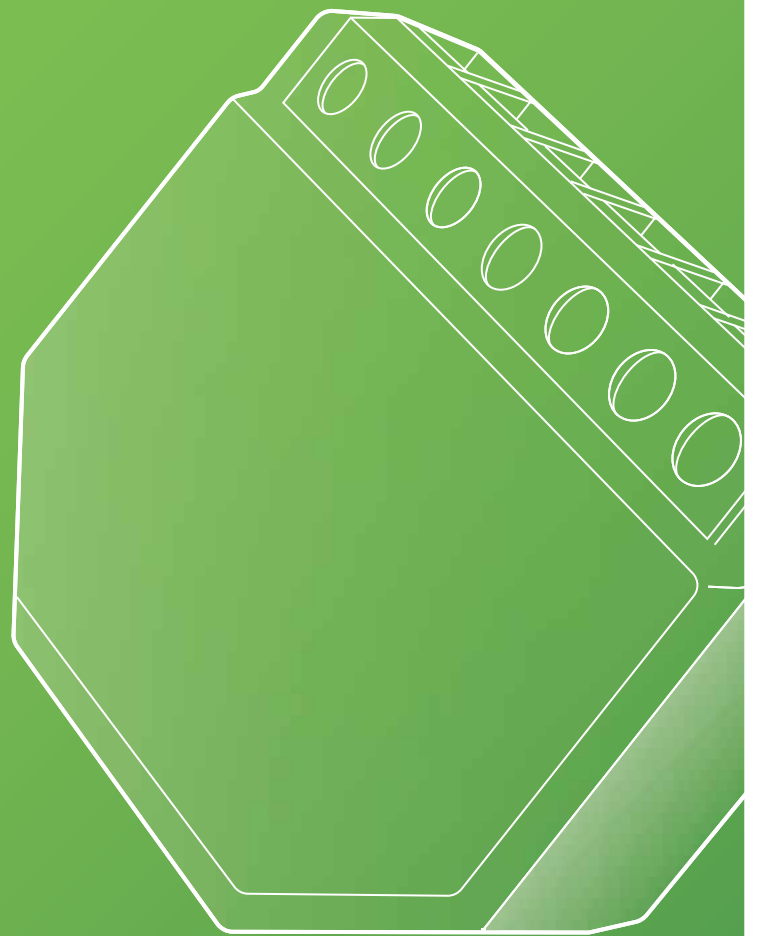

LED strips



Lights



Dimming



EU

ANZ



Shelly Dimmer Gen3

Compatible with no neutral installation

Power supply	220-240 V~ (Shelly Bypass is required)
Ammeter range (AC)	0 A - 3 A, $\pm 5\%$ (when used with neutral)
Dimming type	Trailing edge
Connectivity	Wi-Fi 4 Bluetooth 4.2
CPU	ESP32 C3 / STM32 G051
Flash Memory	8 MB
Size (HxWxD)	38x42.5x16.5 mm / 1.50x1.67x0.65 inch
Weight	24.3 g / 0.86 oz
Certifications	RED, LVD, EMC, ROHS, RCM



[more info →](#)

GLOBAL



Shelly DALI Dimmer Gen3

Power supply	110-240 V~
Max load	Bus power supply guaranteed 10mA (up to 5 DALI control gear units), Short circuit current < 35 mA
Connectivity	Wi-Fi 4 Bluetooth 4.2
CPU	ESP32-C3 Shelly
Flash Memory	8 MB
Size (HxWxD)	38x42.5x16.5 mm / 1.50x1.67x0.65 inch
Weight	18 g / 0.63 oz
Certifications	RED, LVD, EMC, ROHS, RCM, DALI-2



[more info →](#)

EU

US

ANZ



Shelly Wave Dimmer

Power supply	220-240 V ~
Max load	200 W
Connectivity	Z-Wave Plus LR EU: 864 MHz US: 912 MHz Z-Wave Plus EU: 868.4 MHz US: 908.4 MHz ANZ: 919.8 MHz
CPU	Z-Wave® S800
Size (HxWxD)	37x42x16 ± 0.5 mm / 1.46x1.65x0.63 ± 0.02 in
Weight	25 g / 0.88 oz.
Certifications	RED, LVD, EMC, ROHS, RCM, FCC, SA



[more info →](#)



GLOBAL

Shelly Pro Dimmer 1PM



Power supply **110-240 V~**

Max load **200 W**

Connectivity **Wi-Fi 4
Bluetooth 4.2
LAN**

CPU **ESP32-D0WDQ6**

Flash Memory **8 MB**

Size (HxWxD) **94x19x69 mm /
3.70x0.75x2.71 in**

Weight **75 g / 2.7 oz**

Certifications **LVD, RED, EMC, ROHS, RCM**



[more info →](#)



EU
US
ANZ

Shelly Wave PRO Dimmer 1PM



Power supply **110-240 V~**

Max load **200 W**

Connectivity **Z-Wave EU: 868.4 MHz
Z-Wave US: 908.4 MHz
Z-Wave ANZ: 919.8 MHz
Z-Wave® S800**

CPU

Flash Memory **512 kB**

Size (HxWxD) **94x19x69 mm /
3.70x0.75x2.71 in**

Weight **75 g / 2.7 oz**

Certifications **LVD, RED, EMC, ROHS, FCC,
SA**



[more info →](#)



GLOBAL

Shelly Pro Dimmer 2PM



Power supply **110-240 V~**

Max load **200 W per channel**

Connectivity **Wi-Fi 4
Bluetooth 4.2
LAN**

CPU **ESP32-D0WDQ6**

Flash Memory **8 MB**


Size (HxWxD) **94x19x69 mm /
3.70x0.75x2.71 in**

Weight **75 g / 2.7 oz**

Certifications **LVD, RED, EMC, ROHS, RCM**



[more info →](#)

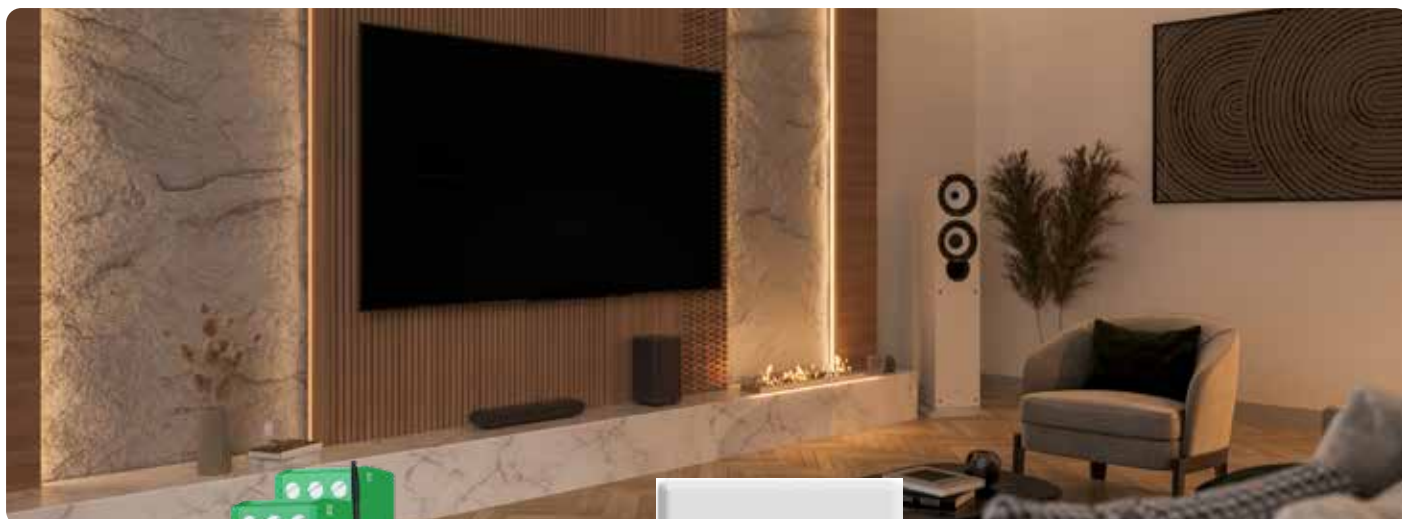

EU
US
ANZ



Shelly Wave PRO Dimmer 2PM



Power supply 110-240 V~

Max load 200 W per channel

Connectivity Z-Wave EU: 868.4 MHz
Z-Wave US: 908.4 MHz
Z-Wave ANZ: 919.8 MHz
CPU Z-Wave® S800

Flash Memory 512 kB

Size (HxWxD) 94x19x69 mm /
3.70x0.75x2.71 in

Weight 75 g / 2.7 oz

Certifications RED, LVD, EMC, ROHS,
RCM, FCC, SA



[more info →](#)

US



Shelly Plus Wall Dimmer



Power supply 100 - 120 V

Max load 400 W (incandescent)
150 W (dimmable only LED
and CFL)

Connectivity Wi-Fi 4
Bluetooth 4.2

CPU ESP32

Flash Memory 4 MB

Size (HxWxD) 120x70x39 mm /
4.72 x 2.76 x 1.50 in

Weight 121 g / 4.28 oz

Certifications LVD, RED, EMC, ROHS



[more info →](#)